

German-Body-Kit
GEBOKit

Innovative body kit technology



German Body Kit

New business opportunities for truck
and trailer body manufacturers

German-Body-Kit **GEBOKit**

Innovative body kit technology



ABOUT US

Body manufacturers can open up new markets with body kits or assembled superstructures by GeBoKit (German Body Kit).

The available kits and superstructures for swing wall bodies, sliding tarpaulin bodies and city distribution bodies are manufactured with high quality. All bodies have been successfully applied for decades.

The easy SKD principle allows fast assembly without time-consuming training or complicated logistics. The kits consist of high quality components to be easily assembled in your workshop. Alternatively, GeBoKit supplies assembled superstructures to be fitted on the chassis only.

In case of spare parts requirements, those can be ordered directly from our website or by phone, and will be delivered within only one day.





GeBoKit - SKD-Kit

KettLiner

Swing wall on the roof

The certified KettLiner beverage body has been proven more than thousands of times. It is operational within seconds; an investment of lasting value, with decades of experience and convincing quality.



opened



half opened



closed

TOP ARGUMENTS

- ✓ **Chain block:**
the robust, precision mechanics is more resistant to high strains compared to the traditional rope system.
- ✓ **Little roof overhang:**
can be opened even in case of limited room height. The small height of the lower wall allows a low loading edge and high ground clearance.
- ✓ **Customizable:**
the modular construction offers individual configuration possibilities for front and rear wall.

TOP QUALITY



precision chain block



upper wall made of aluminium honeycomb panel, lower wall of aluminium profiles



lockers made of stainless steel



steel parts with KTL coating

	KettLiner	SafeServer	CityServer	SafeServer C+
body type	swing wall on the roof	sliding panels	sliding panels	sliding roof bows & tarpaulin
certificates				
beverage certificate	✓	✓	✓	✓
draught beer certificate	✓	✓	✓	✓
XL certificate	✓	✓	✓	✓
roll container certificate	✓	✓		
ONP paper certificate		✓		
chemistry certificate		✓		
GS automotive industry Daimler certificate	✓	✓	✓	✓
load dimensions (int.)				
lateral loading height (mm)	1.740 - 2.390 (in 50 mm steps)	1.600 - 3.000 (in 50 mm steps)	1.900 - 2.300 (in 50 mm steps)	2.000 - 2.850 (in 50 mm steps)
length (mm)	4.600 - 13.600 (customised)	4.600 - 14.900 (customised)	4.500 - 6.600 (customised)	4.600 - 13.595 (customised)
width (mm) between side walls (without pallet stop)	2.490	2.480	2.480	2.460
customised body length available	✓	✓		✓
class of vehicle				
truck (t)	7.5 - 26	7.5 - 26	2.8 - 12	7.5 - 26
centre axle trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
turnable drawbar trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
semi-trailer (m)	✓ (over 8.2 m with middle post)	✓		✓
swap body (mm)	7.150, 7.450, 7.820	7.150, 7.450, 7.820		7.150, 7.450, 7.820
large volume		✓		✓
other versions	KettLiner Classic	SafeServer Simply		



GeBoKit - SKD-Kit

SafeServer

Sliding tarpaulin body with aluminium panels

The original is ready for loading within seconds by a simple push. It has been patented, certified and repeatedly rewarded; an investment of lasting value, with decades of experience and convincing quality.

TOP ARGUMENTS

- ✓ **Safe: incorporated cargo control**
the aluminium panels are opened to the exterior and cannot collide with the load.
- ✓ **Fast: opening and closing within seconds**
no need of side slats, sliding pillars, lateral belts or tension ratchets.
- ✓ **Sensational: robust and durable**
front and rear wall frames are screwed, sliding rails shock-resistant, outer frame canted in one piece.



opened



half opened



closed

TOP QUALITY



aluminium panels with intermediate hinges



quick fasteners at front and rear made of stainless steel




modular front and rear frame: screwed



sliding rails: shock-resistant and galvanized

	KettLiner	SafeServer	CityServer	SafeServer C+
body type	swing wall on the roof	sliding panels	sliding panels	sliding roof bows & tarpaulin
certificates				
beverage certificate	✓	✓	✓	✓
draught beer certificate	✓	✓	✓	✓
XL certificate	✓	✓	✓	✓
roll container certificate	✓	✓		
ONP paper certificate		✓		
chemistry certificate		✓		
GS automotive industry Daimler certificate	✓	✓	✓	✓
load dimensions (int.)				
lateral loading height (mm)	1.740 - 2.390 (in 50 mm steps)	1.600 - 3.000 (in 50 mm steps)	1.900 - 2.300 (in 50 mm steps)	2.000 - 2.850 (in 50 mm steps)
length (mm)	4.600 - 13.600 (customised)	4.600 - 14.900 (customised)	4.500 - 6.600 (customised)	4.600 - 13.595 (customised)
width (mm) between side walls (without pallet stop)	2.490	2.480	2.480	2.460
customised body length available	✓	✓		✓
class of vehicle				
truck (t)	7.5 - 26	7.5 - 26	2.8 - 12	7.5 - 26
centre axle trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
turnable drawbar trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
semi-trailer (m)	✓ (over 8.2 m with middle post)	✓		✓
swap body (mm)	7.150, 7.450, 7.820	7.150, 7.450, 7.820		7.150, 7.450, 7.820
large volume		✓		✓
other versions	KettLiner Classic	SafeServer Simply		

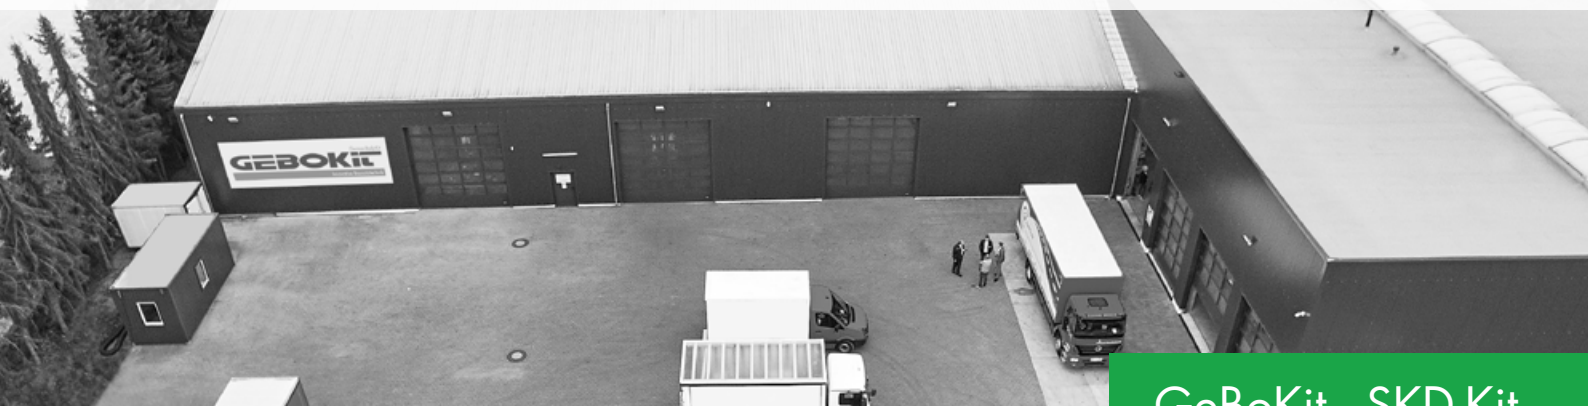

GeBoKit - SKD-Kit

CityServer

Sliding tarpaulin body with aluminium panels

The CityServer is the weight-optimized version of the SafeServer, perfectly suited for distribution in inner cities. It is manufactured in lightweight aluminium construction.

TOP ARGUMENTS

- ✓ **Safe: incorporated cargo control**
the aluminium panels are opened to the exterior and cannot collide with the load.
- ✓ **Fast: opening and closing within seconds**
no need of side slats, sliding pillars, lateral belts or tension ratchets.
- ✓ **Sensational: robust and durable**
front and rear wall frames are screwed, sliding rails shock-resistant, outer frame canted in one piece.



TOP QUALITY



SafeServer sliding system with panels in lightweight construction



SafeServer quick fastener in lightweight construction



modular front and rear frame: screwed



sliding rails: shock-resistant and galvanized

	KettLiner	SafeServer	CityServer	SafeServer C+
body type	swing wall on the roof	sliding panels	sliding panels	sliding roof bows & tarpaulin
certificates				
beverage certificate	✓	✓	✓	✓
draught beer certificate	✓	✓	✓	✓
XL certificate	✓	✓	✓	✓
roll container certificate	✓	✓		
ONP paper certificate		✓		
chemistry certificate		✓		
GS automotive industry Daimler certificate	✓	✓	✓	✓
load dimensions (int.)				
lateral loading height (mm)	1.740 - 2.390 (in 50 mm steps)	1.600 - 3.000 (in 50 mm steps)	1.900 - 2.300 (in 50 mm steps)	2.000 - 2.850 (in 50 mm steps)
length (mm)	4.600 - 13.600 (customised)	4.600 - 14.900 (customised)	4.500 - 6.600 (customised)	4.600 - 13.595 (customised)
width (mm) between side walls (without pallet stop)	2.490	2.480	2.480	2.460
customised body length available	✓	✓		✓
class of vehicle				
truck (t)	7.5 - 26	7.5 - 26	2.8 - 12	7.5 - 26
centre axle trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
turnable drawbar trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
semi-trailer (m)	✓ (over 8.2 m with middle post)	✓		✓
swap body (mm)	7.150, 7.450, 7.820	7.150, 7.450, 7.820		7.150, 7.450, 7.820
large volume		✓		✓
other versions	KettLiner Classic	SafeServer Simply		



GeBoKit - SKD-Kit

SafeServer C+

Sliding tarpaulin
with roof bows


Our SafeServer C+ „the manifold“ is compatible with different types of chassis, swap containers and various loads and goods; it can be easily and completely pushed above the load without demanding any further space.



opened



half opened

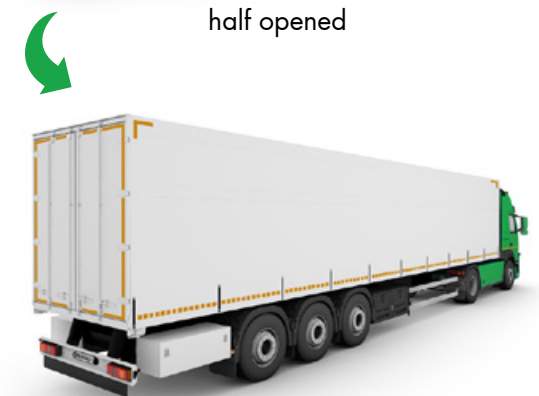

closed

TOP ARGUMENTS

- ✓ **Multi-functional:**
suitable for semi-trailers, trucks, trailers and swap containers.
- ✓ **Maximum opening:**
complete opening possible - from rear to front or front to rear
- ✓ **Minimum space requirement:**
if superstructure is opened and fixed, the remaining space on a semi-trailer still allows loading a 40 ft container.

Heights	Mega	Standard
Coupling height	1.000	1.150
Frame height at the front	125	125
Int. loading height	2.700	2.550
Height in closed condition	+ 110	+ 110

Heights	Mega	Standard
Opened	+ 210	+ 210
Closed (total)	3.935	3.935
Opened (total)	4.035	4.035
Int. height under roof tarpaulin in opened condition reduced by approx. 100 mm		

TOP QUALITY



stability by means of 11 roof bows made of galvanized steel and aluminium panels



3 pairs of belts to be put around the superstructure in closed condition



lower sliding rail made of galvanized steel



rear lockers

	KettLiner	SafeServer	CityServer	SafeServer C+
body type	swing wall on the roof	sliding panels	sliding panels	sliding roof bows & tarpaulin
certificates				
beverage certificate	✓	✓	✓	✓
draught beer certificate	✓	✓	✓	✓
XL certificate	✓	✓	✓	✓
roll container certificate	✓	✓		
ONP paper certificate		✓		
chemistry certificate		✓		
GS automotive industry Daimler certificate	✓	✓	✓	✓
load dimensions (int.)				
lateral loading height (mm)	1.740 - 2.390 (in 50 mm steps)	1.600 - 3.000 (in 50 mm steps)	1.900 - 2.300 (in 50 mm steps)	2.000 - 2.850 (in 50 mm steps)
length (mm)	4.600 - 13.600 (customised)	4.600 - 14.900 (customised)	4.500 - 6.600 (customised)	4.600 - 13.595 (customised)
width (mm) between side walls (without pallet stop)	2.490	2.480	2.480	2.460
customised body length available	✓	✓		✓
class of vehicle				
truck (t)	7.5 - 26	7.5 - 26	2.8 - 12	7.5 - 26
centre axle trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
turnable drawbar trailer (t)	10.5 / 18	10.5 / 18		10.5 / 18
semi-trailer (m)	✓ (over 8.2 m with middle post)	✓		✓
swap body (mm)	7.150, 7.450, 7.820	7.150, 7.450, 7.820		7.150, 7.450, 7.820
large volume		✓		✓
other versions	KettLiner Classic	SafeServer Simply		



GeBoKit - Assembled body

CityLifter

Roller tarpaulin with lower swing wall

The certified CityLifter is perfectly suitable for city distribution and convinces by maximum payload, easy and fast opening and closing; an investment of lasting value, with decades of experience and convincing quality.

TOP ARGUMENTS

- ✓ **Maximum payload:**
extremely lightweight construction with aluminium substructure results in minimum dead weight.
- ✓ **Maximum time-saving:**
only one middle locker for fast opening and closing.



opened



half opened



closed

GeBoKit - Assembled body


TOP QUALITY



substructure completely aluminium



smooth and simple opening mechanism

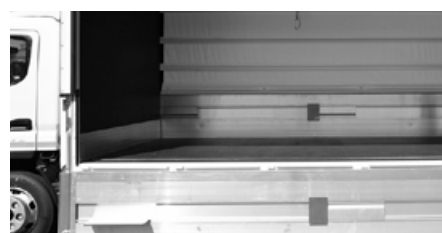

standard fittings: lateral pallet stop and smooth loading operation (inner front wall and corner posts on one level)

	CityLifter	SideLiner
body type	roller tarpaulin & swing wall	swing wall on the roof
certificates		
beverage certificate	✓	✓
draught beer certificate		✓
XL certificate	✓	✓
roll container certificate		✓
GS automotive industry Daimler certificate		
load dimensions (int.)		
lateral loading height (mm)	1.510 - 1.960 (in 50 mm steps)	2.000 - 2.600 (in 100 mm steps)
length (mm)	3.000 - 5.400 (customised)	4.600 - 13.600 (customised)
width (mm) between side walls (without pallet stop)	2.030 - 2.470	2.550
customised body length available	✓	✓
class of vehicle		
truck (t)	2.8 - 10	12 - 26
centre axle trailer (t)	3.5 / 10.5	10.5 / 18
turnable drawbar trailer (t)	3.5 / 10.5	10.5 / 18
semi-trailer (m)		✓ (over 10 m with middle post)
swap body (mm)		



GeBoKit - Assembled body

SideLiner

Swing wall on the roof

The fully automatic superstructure can be opened at the push of a button. It is ready for loading/unloading within seconds and multifunctional in usage; an investment of lasting value, with decades of experience and convincing quality.

TOP ARGUMENTS

- ✓ **Time-saving:**
fast, automatic opening and closing within only 10 seconds. Automatic locking.
- ✓ **Space-saving:**
the lateral space needed for opening and closing the side-wall is about only 520 mm. additionally, low height chassis construction is possible.
- ✓ **Weight-saving:**
the application of lightweight panels increases the payload.



opened



half opened



closed

GeBoKit - Assembled body

TOP QUALITY



fully automatic opening and closing at the push of a button



little lateral space needed



minimum roof overhang in opened condition

	CityLifter	SideLiner
body type	roller tarpaulin & swing wall	swing wall on the roof
certificates		
beverage certificate	✓	✓
draught beer certificate		✓
XL certificate	✓	✓
roll container certificate		✓
GS automotive industry Daimler certificate		
load dimensions (int.)		
lateral loading height (mm)	1.510 - 1.960 (in 50 mm steps)	2.000 - 2.600 (in 100 mm steps)
length (mm)	3.000 - 5.400 (customised)	4.600 - 13.600 (customised)
width (mm) between side walls (without pallet stop)	2.030 - 2.470	2.550
customised body length available	✓	✓
class of vehicle		
truck (t)	2.8 - 10	12 - 26
centre axle trailer (t)	3.5 / 10.5	10.5 / 18
turnable drawbar trailer (t)	3.5 / 10.5	10.5 / 18
semi-trailer (m)		✓ (over 10 m with middle post)
swap body (mm)		

GeBoKit offers innovative superstructures in kit form (semi-knocked-down products) as well as assembled superstructures.

Expand your portfolio with SKD body kits and open up new markets and business opportunities.

Our production plant is in Wittlich-Wengerohr, conveniently situated between Luxemburg/Trier and Koblenz in the western tip of Germany.



GeBoKit GmbH
Belinger Str. 78
DE-54516 Wittlich-Wengerohr

Phone: +49 (0)6571/1499-473
Fax: +49 (0)6571/1499-778
info@gebokit.de
www.gebokit.de